

## TABLE OF CONTENTS

2-5 **Core Features** 6-7 Model CM1401H 8-9 Model CMX1402H 10-11 Model CMX1808 12-13 Model CMX2302 14 **Accessories** 15 Warranty 16 **Model Matrix** 

All Razorback equipment is manufactured in Japan by Canycom and available in both 2WD & 4WD options. All models are certified with relevant CE approval.

The Razorback lawn and vegetation mower is a sure-footed beast, thriving in Australia's most formidable areas by eliminating any noxious weeds that dare to stand in its path, and taking you places that would destroy normal mowing equipment.

#### **WANT MORE?**

For more information including videos, FAQ's, specifications, or to request a demo, please visit our website: www.therazorback.com.au

001Razorback
 razorbackbrushcutters




# Rock Solid Engineering SHAFT DRIVE and HIROSAKI BLADES

The Razorback shaft drive is shared across all models, allowing direct transfer of horsepower to the cutter deck through a PTO shaft. This is the most efficient and effective way of getting power to the blades. Shaft drive is stronger and more reliable than belt drive units, because it eliminates the frustration of having to replace expensive belts, which commonly break in extreme cutting conditions. The shaft drive is a more advanced design and will save you money in the long run.

Razorback blades are composed of special steel known as Hirosaki steel, which is manufactured with special techniques that give it similar properties to Damascus steel.

These techniques involve the metal being folded, forged, tempered and quenched repeatedly, to achieve a special linear grain for which the Samurai Swords gain their legendary ability to cut hard materials while causing little damage to the blade. The techniques used to produce the traditional Samurai Sword have evolved over centuries and have enabled the Japanese to manufacture steel with incredible properties. These special Hirosaki blades are amazingly tough on impact with timber and rock material, but can still be sharpened without specialist tools.

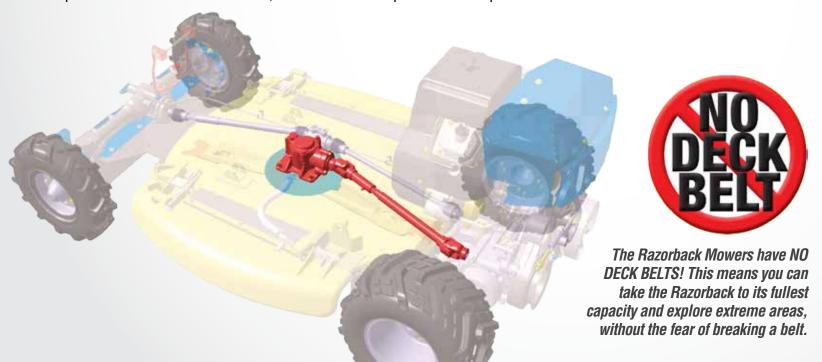

#### TOUGH SWINGING BLADE SYSTEMS

Make ride on mowing and brush cutting even easier with this unique patented blade replacement system.

No tools are necessary.

Anyone can change the blades with ease in the field.

Tool-less blade change only available on CMX1808 & CMX2106

#### Easy Tool-less Blade Change



Shaft Drive - Gets all the power to the blades



**Tough Shaft Driven Gearbox** 



### THE ULTIMATE 4WD LAWN AND VEGETATION MOWER




## Powerful & Efficient 4WD SYSTEM

The Razorback features a tough 4WD system that is unique in its design and quality, and sets this vegetation mower apart from all other mowers.

You can switch from 2WD to 4WD, and depending on the ground conditions, engage the rear diff-lock. Operators will use the 4WD when negotiating steep slopes and engage the diff-lock for extreme undulating terrain. The drive train has a high and low range to best adjust your ground speed to your cutting conditions. This allows you to travel at maximum speed for open flat ground, or use low range to gear down for ultimate power to the 4WD system.

\*\*\*All models (excluding CM1401H) come standard with the 4WD system.

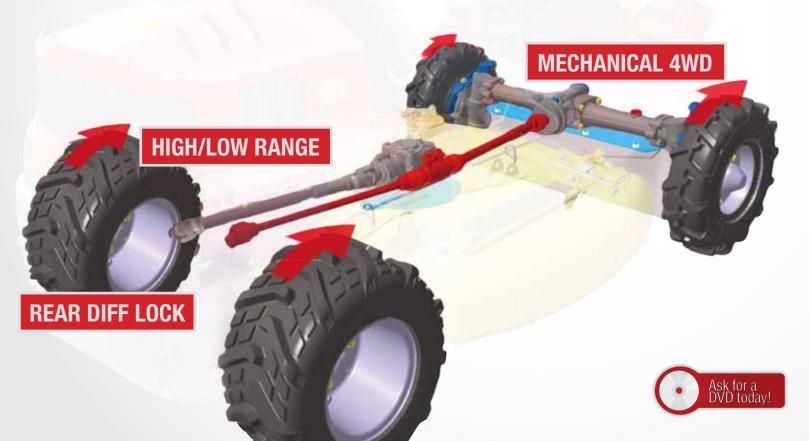

**Tough 4WD system** 



**Dual range final drive** 



Tough, double expanding brakes



**Easily accessible controls** 



## CM1401H

2WD, STURDY FRAME AND DURABLE CONSTRUCTION, VENTURE INTO THICK SCRUB AND MUDDY GROUNDS





- Ultra low seat position creating more stability for hillside mowing
- Low centre of gravity for amazing stability on slopes and rough terrain
- Shaft driven cutting deck
- Compact mowing width for maneuverability and access
- Tight turning radius for mowing around trees
- Selectable positive Diff Lock
- Comfortable ride and easy operation
- High and low ratio gearbox

#### **SPECIFICATIONS**

Model: CM1401H

Cutting Width: 975mm

Cutting Height: 0 - 150mm

Max. Speed: 13.2 km/h

Min. Turn Radius: 1800mm

Fuel Tank: 6.1L

Gearbox: Selectable high & low ratio

Transmission: HST continuously variable

Axles: Ultra Tough Rear Axle





2WD Honda GX390 Engine.



Super tough shaft driven gearbox.




Easy cruise control style ground speed control.



Easy and convenient height of cut control.



Forward and Reverse control.



NEW "Cyclone" air cleaner system.

## CMX1402H

ULTRA STABLE AND COMPACT, SHAFT DRIVEN MOWER FOR LONG GRASS & SMALL SHRUBS





- Ultra low seat position creating more stability for hillside mowing
- Low centre of gravity for amazing stability on slopes and rough terrain
- Ultra tough shaft drive for maximum torque and low maintenance
- Easy and safe control layout so anyone can operate
- Compact mowing width for maneuverability and access
- Tight turning radius for mowing around trees
- Diff lock for ultimate traction
- Comfortable ride and easy operation

#### **SPECIFICATIONS**

Model: CMX1402H Cutting Width: 975mm

Cutting Height: 0-150mm (21 heights)

Max. Speed: 13.2 km/h Min. Turn Radius: 1800mm

Fuel Tank: 6.1L

Gearbox: Selectable high & low ratio

Transmission: Dual Range Infinitely variable hydro

-selectable 2WD or 4WD

Axles: Full cast iron front & rear axle (like a compact tractor)





4WD Honda GX390 Engine.



Super tough shaft driven gearbox.



Easy cruise control style ground speed control.



Easy and convenient height of cut control.



Easy park brake/foot brake control.



NEW "Cyclone" air cleaner system.





- Dual range for increased pulling and climbing power
- No deck belt! Explore extreme terrain without the fear of breaking a belt
- Steering column adjustable for reach, length and angle
- Hour meter and grab handles
- Ultra tight turning circle
- Specialist Diff lock for traction (works just as well climbing & descending)
- Easy tool-less blade changing unique swinging & opening blade guard
- Shaft Driven cutting deck

#### **SPECIFICATIONS**

Model: CMX1808

Cutting Width: 975mm

Cutting Height: 0 – 150mm (21 Heights)

Max. Speed: 13.8km/h

Min. Turn Radius: 1800mm

Fuel Tank: 20L

Transmission: Dual Range Infinitely variable hydro

(selectable 2WD or 4WD)

Axles: Full Cast Front & Rear Axle (Like a compact tractor)





4WD 18HP VANGUARD ENGINE.



SUPER TOUGH SHAFT DRIVEN GEARBOX WITH ADJUSTABLE DISCHARGE DECK.



FOOT PEDAL HEAL/TOE FORWARD REVERSE.



SHAFT DRIVEN 4WD.



DASH MOUNTED DIFF LOCK AND 4WD CONTROLS.





- Ultra low seat position to avoid obstacles
- Low centre of gravity for amazing stability on slopes and rough terrain
- Ultra tough shaft drive for strength and durability
- Easy and safe control layout for ease of operation
- Compact mowing width for maneuverability and access
- Tight turning radius of 1800mm
- Selectable 4WD & diff lock for ultimate traction (Works just as well climbing & descending)
- Easy tool-less blade changing with unique swinging & opening blade guard

#### SPECIFICATIONS

Model: CMX2302

Cutting Width: 975mm

Cutting Height: 0 – 150mm (21 Heights)

Max. Speed: 13.8km/h Min. Turn Radius: 1800mm

Fuel Tank: 20L

Transmission: Dual Range Infinitely Variable Hydro
- Selectable 2WD or 4WD - charge pump with 7L hydro reservoir

Axles: Full Cast Front & Rear Axle (Like a compact tractor)





23HP V-Twin Vanguard Engine.



Super tough shaft driven gearbox with adjustable discharge deck.



Easy cruise control style ground speed control.



Easy and convenient height of cut control.



Dash mounted Diff Lock/dual range 2WD/4WD controls.



Donaldson air cleaner with Cyclone Pre-cleaner.

## Optional ACCESSORIES

For more information and accessories visit www.therazorback.com.au

A Rollover Protection System (ROPS), complete with a seat belt, is an optional accessory to improve operator protection in the case of accidental roll-overs and tip-overs. ROPS can be fitted to any model in the Razorback range.

**RECOVERY WINCH** 



The 12 Volt DC Electric Winch is designed to pull you out of difficult situations! 15M long, with a 4mm wire rope, it fits all models. This winch is designed to pull its own weight for recovery bog purpose only; not for towing, hauling or use as a crane. Only to be used in 60 second bursts.









The sun canopy is designed to give you protection from the sun and heat while you're out all day! Can be easily fitted to any model in the Razorback range that is

**DUAL WHEELS** 

## The Razorback WARRANTY

The Razorback warranty period is equal to 3 years or 1000 hours (whichever comes first), and warrants the original retail purchaser that the Razorback machine shall be free from defects in material and/or manufacturer's workmanship for the warranty period.

Warranty Repairs must be performed by authorised Razorback dealers, who are best able to determine the proper repair and warranty process.

For warranty claims to be honoured, the Razorback must be serviced according to the maintenance schedule as detailed in the owners manual. It is recommended that your servicing is performed by an authorised Razorback dealer.



Visit www.therazorback.com.au/warranty for more details

#### **Customer Testimonials**

This machine is amazing! There are not many places it couldn't go and I am still trying to find the operational limitations. It doesn't seem to have many!

RAZORBACK DEALER. **DURAL NSW** 

The Razorback is awesome! I actually look forward to using it - I can't believe that mowing/ slashing can be so much fun - it is great to drive and gets into places that I had written off as always being an overgrown mess... All in all the best purchase I have made in a while!

This is an excellent machine, very robust and well-engineered, and the blades are really strong! After hitting rocks it only needed minor dressing. Also has great stability on steep slopes...

WILT TOUGH

**RAZORBACK OWNER INGLEWOOD SA** 



 Tough • Long

Brush

 Rough Slopes

Regrowth

Wet

Lawn

- Muddy
  - Vines

#### **+COMMON WEEDS INCLUDING**



Acacia (Non Native) African Boxthorn American Rats Tail Grass Asparagus Fern Blackberry Camphor Laurel



Cobblers Peg Dutchman's Pipe Fireweed Giant Parramatta Grass Giant Rats Tail Grass Gorse



**Grader Grass** Groundsel Kikuvu Grass Lantana



Mother-Of-Millions Needle Grass Parramatta Grass Parthenium Patterson's Curse Prickly Acacia Regrowth Prickly Pear Privet Regrowth **Rats Tail Grass** 

Tortured Willow Regrowth

Tobacco Weed















### SPECIFICATIONS







	Model	RAZORBACK CM1401H	RAZORBACK CMX1402H	RAZORBACK CMX1808	RAZORBACK CMX2302
	Manufacturer	Canycom - Japan	Canycom - Japan	Canycom - Japan	Canycom - Japan
	Engine Manufacturer/Model	2WD Honda GX390	4WD Honda GX390	4WD Vanguard	4WD Vanguard Model
þ	Output/Horsepower	11.7HP (8.7 KW)	11.7HP (8.7 KW)	18.3HP (13.4 KW)	23HP (17.1 KW)
	Displacement (cc)	389	389	653	627
è	Torque	26.5 Nm	26.5 Nm	43.3 Nm	45.6 Nm
4	Fuel type	Petrol	Petrol	Petrol	Petrol
Ą	Fuel capacity (L)	6.1	6.1	20	20
à	Ground speed (Km/hr)	13.2	13.2	13.8	13.8
	Transmission	Continuously variable High 0-13.2 Low 0-7.4	Continuously variable High 0-13.2 Low 0-7.4	Continuously variable High: 0 - 13.8 Low: 0 - 7.2	Continuously variable High: 0 - 13.8 Low: 0 - 7.7
k	Final drive	2wd heavy duty dual range w. positive diff lock	Selectable 4wd heavy duty dual range w. positive diff lock	Selectable 4wd heavy duty dual range w. positive diff lock	Selectable 4wd heavy duty dual range w. positive diff lock
	Brakes - (F) front (R) rear	Enclosed internally expanding automotive style (R)	Enclosed internally expanding automotive style (F/R)	Enclosed internally expanding automotive style (F/R)	Enclosed internally expanding automotive style (F/R)
	Steering	Enclosed automotive style rack & pinion			
7.0	Turning radius (mm) Inside	1800	1800	1800	1800
	Operator seating height (mm)	435	435	435	455
	Lights	Front	Front	Front	Front
	Warranty*	3 Years / 1000 Hours	3 Years / 1000 Hours	3 Years / 1000 Hours	3 Years / 1000 Hours
ų.	Weight (kg) - fuel tank full	320	340	360	450
H	Overall dimensions (cm)	1980L x 1020W x 900H	1980L x 1020W x 900H	1997L x 1020W x 885H	1997L x 1020W x 905H
ć	Cutting height (mm)	0-150	0-150	0-150	0-150
	Cutting width (mm)	975	975	975	975
	Gradeability/Stability	15°/30°	25°/30°	25°/30°	25°/30°
	Blade system**	Bolt on swing blades	Bolt on swing blades	Tool-less Easy Change - Swing Blade	Tool-less Easy Change - Swing Blade
V	Drive svstem	Shaft Drive	Shaft Drive	Shaft Drive	Shaft Drive

#### **BOOK A FREE DEMO ON YOUR PROPERTY TODAY**



Call us on 1800 088 567
Visit www.therazorback.com.au



\* Refer to website for more details on our warranty.

\*\* Refer to website for blade options. Ask us about our additional options and accessories.